

MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER

TA-AP

Acoustical Plaster Access Door

STANDARD SIZES (W × H)

12x12	12x24	18x18
24x24	24x36	

CUSTOM SIZE (W × H)

W × H

SUFFIX OPTIONS

- AKL Allen Key Latch
- CL Cylinder Lock (one per door)
- CLD Cylinder Lock with Dust Shutter (one per door)
- SS Stainless Steel Construction (Type 304 No. 4 Sat)



PRODUCT VIEW

PROJECT INFORMATION

Project Name

Architect

Contractor

Date

NOTES:

TA-AP

ACOUSTICAL PLASTER ACCESS DOOR

PRODUCT DESCRIPTION

The AP Series Acoustical Plaster Access Door is designed to install flush with the plaster surface. The 16-gauge galvanized steel door is recessed 5/8 inch and lined with metal lath to receive plaster. The frame includes a 3-inch-wide metal lath flange on all four sides to key into the surrounding plaster. The door has a concealed recessed hinge and a screwdriver-operated latch, with a white prime coat finish suitable for painting.

FEATURES

- Door and frame are fabricated from 16-gauge galvanized steel.
- Door is recessed 5/8 inch and lined with metal lath for plaster application.
- Frame has a 3-inch-wide metal lath flange on all four sides.
- Concealed hinge operates out of sight.
- Standard latch is screwdriver operated.
- White prime coat finish is suitable for painting.

APPLICATION

Used to provide concealed access openings in plaster wall and ceiling surfaces where a flush, plaster-integrated appearance is desired.

MATERIAL

- Frame:** 16-gauge galvanized steel with metal lath flange
- Door:** 16-gauge galvanized steel recessed 5/8 inch and lined with metal lath

DETAILS

STANDARD SIZES (W × H)

12x12	12x24
18x18	24x24
24x36	

Custom sizes available.

NOTES:



STANDARD AVAILABLE SIZES

Special sizes available upon request.

NOMINAL DOOR SIZE (W × H)	CEILING OPENING (minimum required)	LATCHES	WEIGHT
AP 12" x 12"	12-1/4" x 12-1/4"	1	7 lbs.
AP 12" x 24"	12-1/4" x 24-1/4"	2	13.5 lbs.
AP 18" x 18"	18-1/4" x 18-1/4"	2	14 lbs.
AP 24" x 24"	24-1/4" x 24-1/4"	4	20.5 lbs.
AP 24" x 36"	24-1/4" x 36-1/4"	5	24.5 lbs.

NOTES:

1. CONCEALED HINGE
2. MOUNTING HOLES
3. SCREWDRIVER OPERATED LATCH
4. DOOR
5. METAL LATH
6. FRAME

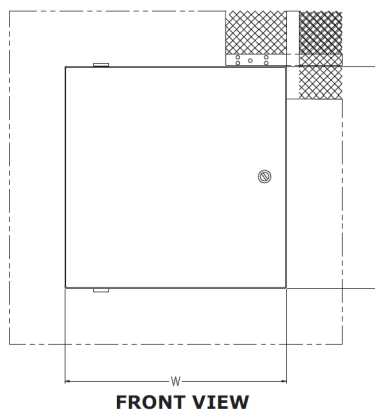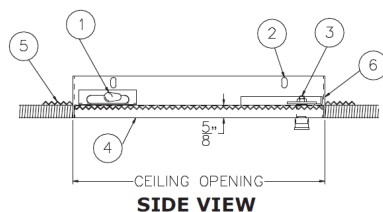

SECTION DETAIL