

MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER

TA-AT

Acoustical Tile Access Door

STANDARD SIZES (W × H)

8x8	12x12	12x24
16x16	18x18	24x24
24x36		

CUSTOM SIZE (W × H)

W × **H**

SUFFIX OPTIONS

AKL Allen Key Latch
CL Cylinder Lock (one per door)
CLD Cylinder Lock with Dust Shutter
SS Stainless Steel Construction, Type 304 No. 4 Sat
GB Galvanized Drywall Bead



PRODUCT VIEW

PROJECT INFORMATION

Project Name

Architect

Contractor

Date

NOTES:

TA-AT

ACOUSTICAL TILE ACCESS DOOR

PRODUCT DESCRIPTION

The AT Series Acoustical Tile Access Door is a flush, virtually concealed access door designed for acoustical tile or gypsum board wall and ceiling applications. The 16-gauge galvanized steel door and frame receive a white prime coat finish. The door is recessed 5/8 inch to accept acoustical tile or gypsum board and includes a concealed hinge and screwdriver-operated latch.

FEATURES

- The door is recessed 5/8 inch to accept acoustical tile or gypsum board.
- The concealed hinge operates out of sight so only the metal thickness of the door and frame is visible.
- The standard latch is screwdriver operated.
- The door and frame are fabricated from 16-gauge galvanized steel.
- Special sizes are available upon request.

APPLICATION

Used to provide concealed access openings in acoustical tile or gypsum board walls and ceilings.

MATERIAL

Frame: 16-gauge galvanized steel

Door: 16-gauge galvanized steel

DETAILS

STANDARD SIZES (W × H)

8x8	12x12
12x24	16x16
18x18	24x24
24x36	

Custom sizes available.

NOTES:


STANDARD AVAILABLE SIZES

Special sizes available upon request.

NOMINAL DOOR SIZE (W X H)	CEILING OPENING (minimum required)	LATCHES	WEIGHT
AT 8" x 8"	8-1/8" x 8-1/8"	1	4 lbs.
AT 12" x 12"	12-1/8" x 12-1/8"	1	5.5 lbs.
AT 12" x 24"	12-1/8" x 24-1/8"	2	9.5 lbs.
AT 16" x 16"	16-1/8" x 16-1/8"	2	8.5 lbs.
AT 18" x 18"	18-1/8" x 18-1/8"	2	10 lbs.
AT 24" x 24"	24-1/8" x 24-1/8"	4	16 lbs.
AT 24" x 36"	24-1/8" x 36-1/8"	5	24.5 lbs.

NOTES:

1. TILE, BY OTHERS
2. CONCEALED HINGE
3. MOUNTING HOLES
4. SCREWDRIVER OPERATED LATCH
5. FRAME

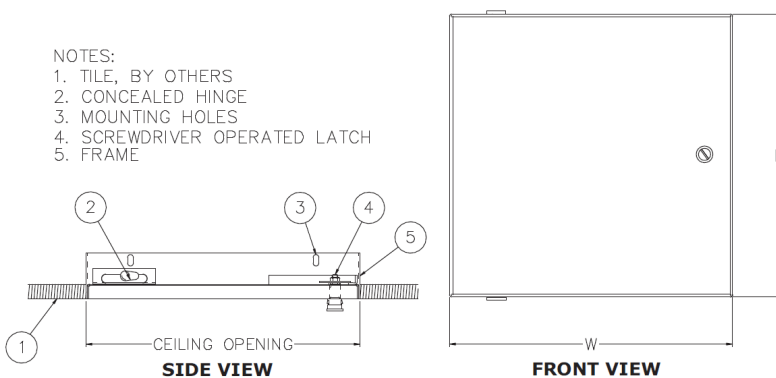

SECTION DETAIL