

MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER

TA-CFR

Ceiling Fire Resistant Access Door

STANDARD SIZES (W × H)

12x12	18x18	22x30
24x24		

CUSTOM SIZE (W × H)

W × H

SUFFIX OPTIONS

- AKL Allen Key Latch
- CL Cylinder Lock (one per door)
- CLD Cylinder Lock with Dust Shutter (one per door)
- SS Stainless Steel Construction (Type 304 No. 4 Sat)



PRODUCT VIEW

PROJECT INFORMATION

Project Name

Architect

Contractor

Date

NOTES:

TA-CFR

CEILING FIRE RESISTANT ACCESS DOOR

PRODUCT DESCRIPTION

The CFR Series ceiling fire resistant access door is designed for fire-rated drywall ceiling assemblies. The door is recessed 1-1/2 inches to accommodate dual-layer ceiling tile. The frame is fabricated from 18-gauge galvanized steel and the door is fabricated from 16-gauge galvanized steel, both with a white prime coat finish. The door has a continuous piano hinge and screwdriver-operated latch. The access door itself is not fire rated, but its steel construction and use with fire-rated ceiling tile help maintain the fire-resistant quality of the ceiling assembly.

FEATURES

- Door is recessed 1-1/2 inches to accommodate dual-layer ceiling tile.
- Frame is fabricated from 18-gauge galvanized steel.
- Door panel is fabricated from 16-gauge galvanized steel.
- Continuous piano hinge is provided.
- Standard latch is screwdriver operated.
- White prime coat finish is suitable for painting.

APPLICATION

Used in fire-rated drywall ceiling assemblies requiring a recessed access opening; it is not intended for suspended ceiling applications.

MATERIAL

Frame: 18-gauge galvanized steel

Door: 16-gauge galvanized steel

DETAILS

STANDARD AVAILABLE SIZES

Special sizes available upon request.

NOMINAL DOOR SIZE (W x H)	CEILING OPENING	LATCHES	WEIGHT
CFR 12" x 12"	10-1/2" x 10-1/2"	1	7.3 lbs.
CFR 18" x 18"	16-1/2" x 16-1/2"	2	12.5 lbs.
CFR 24" x 24"	22-1/2" x 22-1/2"	2	21.8 lbs.
CFR 22" x 30"	20-1/2" x 28-1/2"	4	26.0 lbs.


STANDARD SIZES (W x H)

12x12	18x18
22x30	24x24

Custom sizes available.

NOTES:

- NOTES:
1. DOOR
 2. SCREWDRIVER OPERATED LATCH
 3. MOUNTING HOLES
 4. CONCEALED HINGE

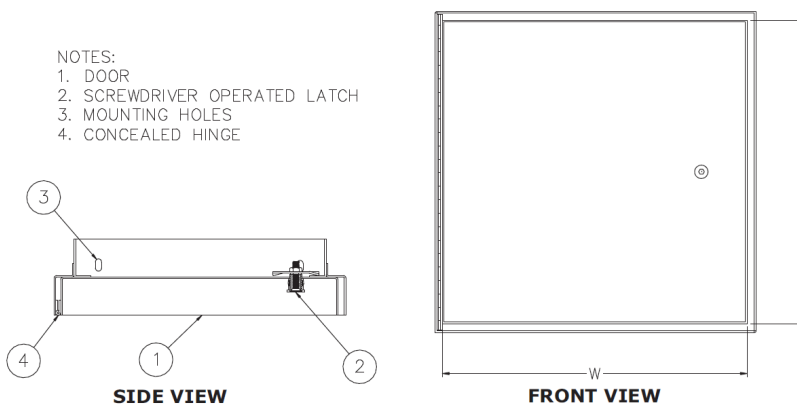

SECTION DETAIL