

MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER

TA-FR

Fire Rated Access Door

SUFFIX OPTIONS

SS Stainless Steel Construction, Type 304 No. 4 Sat
CL Cylinder Lock, one per door

STANDARD SIZES (W × H)

8x8	10x10	12x12
12x18	12x24	14x14
16x16	18x18	20x20
22x22	22x30	24x24
24x36	24x48	30x30
32x32	36x36	36x48
48x48		

CUSTOM SIZE (W × H)

W × H



PRODUCT VIEW

PROJECT INFORMATION

Project Name

Architect

Contractor

Date

NOTES:

TA-FR

FIRE RATED ACCESS DOOR

PRODUCT DESCRIPTION

The FR Series Fire Rated Access Door is a wall-only access door fabricated from 16-gauge galvanized steel with a white prime coat finish suitable for painting. The door is fire rated by Underwriters Laboratories for 1-1/2 hours with a B Label in accordance with ANSI-UL 10B and for 2 hours in walls in accordance with CAN/ULC S104. It includes a concealed hinge, heavy-duty spring closer for positive latching, recessed exterior ring-operated sliding-bolt latch, and interior latch release slide.

FEATURES

- Door and frame are fabricated from 16-gauge galvanized steel.
- White prime coat finish is suitable for painting.
- Concealed hinge operates out of sight so only the door and frame are visible.
- Heavy-duty spring closer provides positive latching when the door closes.
- Interior latch release slide allows the door to be opened from the inside.
- Recessed exterior latch is operated by a ring attached to the sliding bolt.
- Frame includes masonry anchors and bolt holes for installation in wall construction.

APPLICATION

Used for providing fire-rated access openings in wall construction, including masonry and other wall types.

MATERIAL

Frame: 16-gauge galvanized steel

Door: 16-gauge galvanized steel



DETAILS

STANDARD AVAILABLE SIZES

Special sizes available upon request.

NOMINAL DOOR SIZE (W x H)	WALL OPENING (minimum required)	LATCHES	WEIGHT
FR 8" x 8"	8-3/8" x 8-3/8"	1	6 lbs.
FR 10" x 10"	10-3/8" x 10-3/8"	1	7.5 lbs.
FR 12" x 12"	12-3/8" x 12-3/8"	1	9 lbs.
FR 12" x 18"	12-3/8" x 18-3/8"	1	10.5 lbs.
FR 12" x 24"	12-3/8" x 24-3/8"	1	13 lbs.
FR 14" x 14"	14-3/8" x 14-3/8"	1	10 lbs.
FR 16" x 16"	16-3/8" x 16-3/8"	1	12.5 lbs.
FR 18" x 18"	18-3/8" x 18-3/8"	1	15 lbs.
FR 20" x 20"	20-3/8" x 20-3/8"	1	18 lbs.
FR 22" x 22"	22-3/8" x 22-3/8"	1	22 lbs.
FR 22" x 30"	22-3/8" x 30-3/8"	2	28 lbs.
FR 24" x 24"	24-3/8" x 24-3/8"	2	24.5 lbs.
FR 24" x 36"	24-3/8" x 36-3/8"	2	33 lbs.
FR 24" x 48"	24-3/8" x 48-3/8"	2	42 lbs.
FR 30" x 30"	30-3/8" x 30-3/8"	2	33.5 lbs.
FR 32" x 32"	32-3/8" x 32-3/8"	2	35 lbs.
FR 36" x 36"	36-3/8" x 36-3/8"	2	43 lbs.
FR 36" x 48"	36-3/8" x 48-3/8"	2	74 lbs.

- NOTES:
1. CHIP OUT MASONRY TO CLEAR BOLT COVER
 2. CONCEALED HINGE
 3. DOOR
 4. RECESSED LATCH
 5. INTERIOR LATCH RELEASE SLIDE
 6. CLOSING SPRING
 7. FRAME

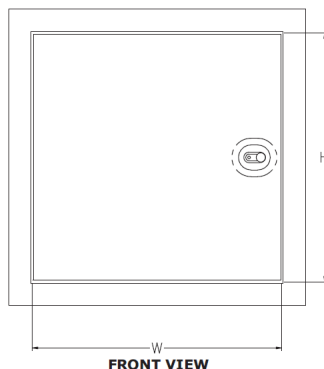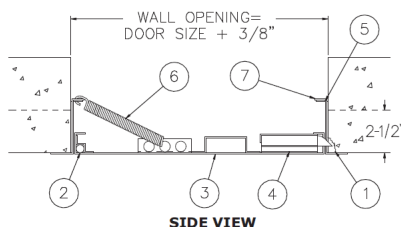

SECTION DETAIL

STANDARD SIZES (W x H)

8x8	10x10
12x12	12x18
12x24	14x14
16x16	18x18
20x20	22x22
22x30	24x24
24x36	24x48
30x30	32x32
36x36	36x48
48x48	

Custom sizes available.

NOTES: