

MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER

TA-SLA

Slammer Access Door

STANDARD SIZES (W × H)

12x12	16x16	18x18
24x24	24x36	24x48
36x36	36x48	

CUSTOM SIZE (W × H)

W × **H**

SUFFIX OPTIONS

- LD Lock Provided by Others, one prep per door
- MAS Masonry Anchor Straps
- MLP Mortise Cylinder Lock, one prep per door
- FA12 Folger Adams #10 Lock
- FA12KEY Folger Adams Key for #10 Lock



PRODUCT VIEW

PROJECT INFORMATION

Project Name

Architect

Contractor

Date

NOTES:

TA-SLA

SLAMMER ACCESS DOOR

PRODUCT DESCRIPTION

Trade Access SLA Series Slammer Access Doors are security access doors designed for abusive and vandal-prone institutional conditions. The door is fabricated from 10-gauge steel and uses a welded 3/16-inch by 2-inch by 2-inch angle-steel frame with pre-punched mounting holes. Heavy-duty hinges are welded to the door and frame, and the standard finish is a white prime coat suitable for painting. Doors provide maintenance access to plumbing chases, shut-off valves, and electrical apparatus located behind finished walls. A security lock is not included as standard; lock requirements must be specified separately.

FEATURES

- Door is fabricated from 10-gauge steel.
- Frame is constructed from welded 3/16-inch by 2-inch by 2-inch angle steel.
- Frame includes pre-punched mounting holes.
- Heavy-duty hinges are welded to the door and frame.
- Door is designed for high-security, vandal-resistant institutional applications.
- Standard finish is a white prime coat suitable for painting.

APPLICATION

Used to provide secure maintenance access to plumbing chases, shut-off valves, and electrical apparatus behind finished walls in institutions and other vandal-prone areas.

MATERIAL

- Frame:** 3/16-inch by 2-inch by 2-inch welded angle steel
- Door:** 10-gauge steel

DETAILS

STANDARD SIZES (W × H)

12x12	16x16
18x18	24x24
24x36	24x48
36x36	36x48

Custom sizes available.

NOTES:


STANDARD AVAILABLE SIZES

Special sizes available upon request.


NOMINAL DOOR SIZE (W × H)	WALL OPENING (minimum required)	LOCK PREP	WEIGHT	-SDL (Extra Latches)
SLA 12" x 12"	12-1/2" x 12-1/2"	1	29 lbs.	0
SLA 16" x 16"	16-1/2" x 16-1/2"	1	37 lbs.	0
SLA 18" x 18"	18-1/2" x 18-1/2"	1	42 lbs.	0
SLA 24" x 24"	24-1/2" x 24-1/2"	1	59 lbs.	0
SLA 24" x 36"	24-1/2" x 36-1/2"	1	78.5 lbs.	4
SLA 24" x 48"	24-1/2" x 48-1/2"	1	96 lbs.	4
SLA 36" x 36"	36-1/2" x 36-1/2"	1	102 lbs.	4
SLA 36" x 48"	36-1/2" x 48-1/2"	1	126 lbs.	4

Notes:

1. Frame
2. Heavy Duty Lock
3. Door Stop
4. Lock Keeper
5. Door
6. Heavy Duty Hinge
7. Mounting Holes
8. SDL (Extra Latches)
Big Doors Only

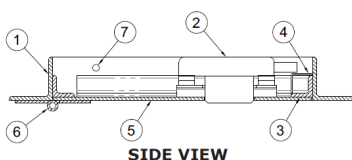

SIDE VIEW

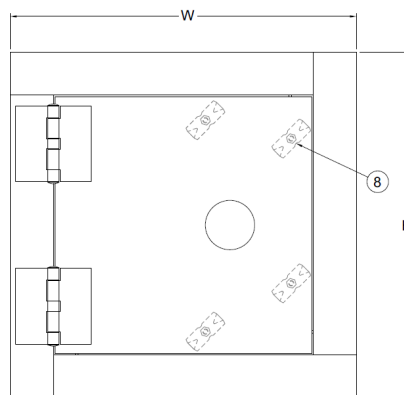

FRONT VIEW

SECTION DETAIL