

MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER

TA-SMD

Medium Security Access Door

STANDARD SIZES (W × H)

12x12	16x16	18x18
24x24	24x36	36x36

CUSTOM SIZE (W × H)

W × **H**

SUFFIX OPTIONS

- CL Cylinder Lock, one per door
- CLD Cylinder Lock with Dust Shutter, one per door
- SS Stainless Steel Construction, Type 304 No. 4 sat



PRODUCT VIEW

PROJECT INFORMATION

Project Name

Architect

Contractor

Date

NOTES:

TA-SMD

MEDIUM SECURITY ACCESS DOOR

PRODUCT DESCRIPTION

Trade Access SMD Series medium security access doors are fabricated from 12-gauge galvanized steel with a white prime coat finish. The door has rounded safety corners, a continuous concealed pivoting rod hinge, and an Allen-head latch operated with a security pin. The one-piece frame has no miters or welds on the face and is provided with bolt holes.

FEATURES

- Door and frame are fabricated from 12-gauge galvanized steel.
- The door has rounded safety corners.
- A continuous concealed pivoting rod hinge is provided.
- The standard latch is an Allen head with a security pin.
- The one-piece frame has no miters or welds on the face.
- The frame is provided with bolt holes.

APPLICATION

Suitable for new installation or remodeling work in detention centers, behavioral health facilities, and schools.

MATERIAL

Frame: 12-gauge galvanized steel

Door: 12-gauge galvanized steel

DETAILS

STANDARD AVAILABLE SIZES

Special sizes available upon request.

NOMINAL DOOR SIZE (W x H)	WALL OPENING	LATCHES	LBS.
SMD 12" x 12"	12-1/2" x 12-1/2"	1	12
SMD 16" x 16"	16-1/2" x 16-1/2"	2	18
SMD 18" x 18"	18-1/2" x 18-1/2"	2	22
SMD 24" x 24"	24-1/2" x 24-1/2"	4	34
SMD 24" x 36"	24-1/2" x 36-1/2"	5	47
SMD 36" x 36"	36-1/2" x 36-1/2"	5	65


STANDARD SIZES (W x H)

12x12	16x16
18x18	24x24
24x36	36x36

Custom sizes available.

NOTES:

- NOTES:
1. CONCEALED PIVOTING ROD HINGE
 2. DOOR
 3. FRAME
 4. ALLEN HEAD WITH SECURITY PIN
 5. MOUNTING HOLES

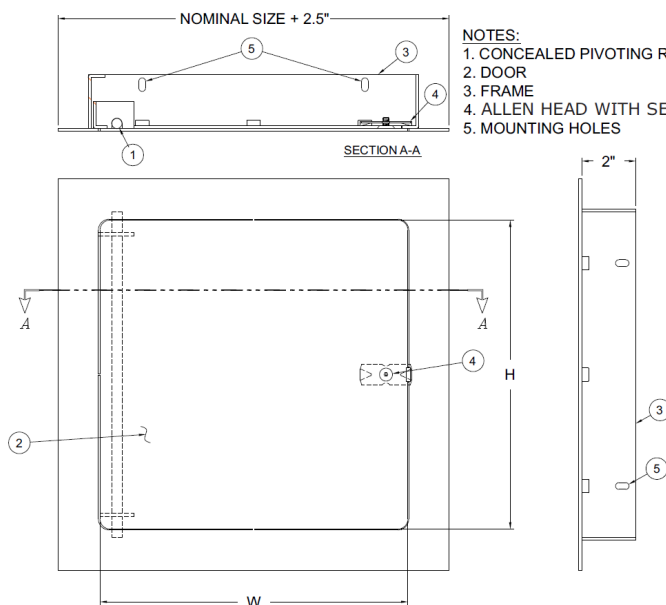

SECTION DETAIL