

MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER

TA-DT

Duct Access Door

SUFFIX OPTIONS

CNH Cam Latch-Non Hinged

STANDARD SIZES (W × H)

6x6	8x8	10x10
12x12	14x14	16x16
18x18	20x20	24x24

CUSTOM SIZE (W × H)

W × **H**



PRODUCT VIEW

PROJECT INFORMATION

Project Name

Architect

Contractor

Date

NOTES:

TA-DT

DUCT ACCESS DOOR

PRODUCT DESCRIPTION

Trade Access DT Series duct access doors provide access to equipment installed within ducts. The 1-inch-thick insulated double-wall door panel is fabricated from 24-gauge galvanized steel and includes gaskets between the panel and frame for a tight seal without obstruction in the air system. The 24-gauge galvanized steel frame has knock-over tabs for attachment to the duct. The door is furnished with a continuous piano hinge and a self-tightening hand-operated cam latch.

FEATURES

- The door has 1-inch-thick insulated double-wall construction.
- Gaskets between the door panel and frame provide a tight seal.
- The frame includes knock-over tabs for attachment to the duct.
- The door uses a continuous piano hinge.
- The self-tightening cam latch is hand operated.

APPLICATION

Used to provide service access to equipment installed within ductwork.

MATERIAL

Frame: 24-gauge galvanized steel

Door: 24-gauge galvanized steel

DETAILS

STANDARD AVAILABLE SIZES

Special sizes available upon request.

NOMINAL DOOR SIZE (W x H)	DUCT OPENING	CAM LATCHES	WEIGHT
DT 6" x 6"	4-3/4" x 4-3/4"	1	1.5 lbs.
DT 8" x 8"	6-3/4" x 6-3/4"	1	2.5 lbs.
DT 10" x 10"	8-3/4" x 8-3/4"	1	3 lbs.
DT 12" x 12"	10-3/4" x 10-3/4"	1	4 lbs.
DT 14" x 14"	12-3/4" x 12-3/4"	2	5 lbs.
DT 16" x 16"	14-3/4" x 14-3/4"	2	7 lbs.
DT 18" x 18"	16-3/4" x 16-3/4"	2	8 lbs.
DT 20" x 20"	18-3/4" x 18-3/4"	2	11 lbs.
DT 24" x 24"	22-3/4" x 22-3/4"	2	13 lbs.


STANDARD SIZES (W x H)

6x6	8x8
10x10	12x12
14x14	16x16
18x18	20x20
24x24	


Custom sizes available.

NOTES:

- NOTES:
1. TABS
2. CONCEALED HINGE
3. CAM LATCH



SIDE VIEW

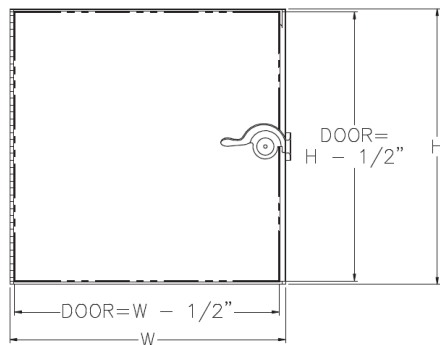

FRONT VIEW

SECTION DETAIL